



PoE Switch 4p M

PoE switch with battery backup

350-205

Publication date 2025-02-26



Table of Contents

1. Before you begin	4
1.1. Information	4
1.1.1. Support	4
1.1.2. Link to the latest information	4
1.1.3. Help us make better products	4
2. About PoE from Milleteknik	5
3. How PoE powers devices connected to the power supply	5
4. Component overview PoE M	6
5. Keystone	6
6. Wall mounting	6
7. Connection of batteries	7
8. Commissioning	8
9. Commissioning - how to start the unit	9
9.1. Connect in this order	9
10. Status indications	10
11. Maintenance	11
11.1. battery change	11
12. Product data sheet	11
12.1. PoE	11
12.1.1. Technical specifications	12
12.1.2. Name, article number and e-number	12
12.1.3. About PoE from Milleteknik	12
PoE Switch 4p M	12
12.1.4. Power over Ethernet from Milleteknik	12
12.1.5. Limitations	12
12.1.6. Areas of use	13
12.1.7. Alarm	13
12.1.8. Fixed installation	13
12.1.9. Battery types	13
12.2. Regulations and certifications	13
12.2.1. Requirements that the product meets	13
12.3. Expected operating time in the event of a power failure (with new batteries)	13
12.4. Circuit boards - Technical data	14
12.4.1. Technical data: CEO 3	14
Control alarm limit with JU2	14
Control alarm limit	14
Fuses	14
12.4.2. Technical data: PoE card	15
Limitations	15
12.5. Power supply	15
12.5.1. Power supply - Technical Data LRS-150-48	15
12.6. Technical data enclosures	16
12.6.1. Enclosures - Technical Data M	16
12.7. Link to the latest information	16
12.8. Warranty, support, country of manufacture and country of origin	17
12.8.1. Warranty	17
12.8.2. Support	17
Spare parts	17
Support after the warranty period	17
Questions about product performance?	17
12.8.3. Country of manufacture	17
12.8.4. Designed and produced by: Milleteknik AB	17
12.9. Batteries - recommended, not included	17



12.9.1. Batteries are not included they are sold separately	17
12.9.2. 7.2 Ah, 12 V AGM battery	18
13. Product life cycle, environmental impact and recycling	18
14. Address and contact details	18

1. BEFORE YOU BEGIN

1.1. Information



READ THIS FIRST!

Electronics, regardless of enclosure, are intended for use in a controlled indoor environment. Mains voltage should be disconnected during installation.

It is the installer's responsibility that the system is suitable for its intended use. Only authorized persons should install and maintain the system.

All information subject to change.

Instruction manual in Swedish in original¹.

1.1.1. Support

Do you need help with installation or connection? Scan the QR code to read the entire manual.

This instruction item number: 350-205 \$ {{/d:article [1]/@xml:lang}} \$

You will find answers to many questions at: www.milleteknik.se go to your product to read more, download manuals and other product information.

Telephone: +46 31- 340 02 30, e-mail: support@milleteknik.se.

Support is open: Monday-Thursday 08:00-16:00, Fridays 08:00-15:00. Closed 11:30-13:15.

1.1.2. Link to the latest information

Products and software are subject to updates, you will always find the latest information on our website.

[PoE](#)

1.1.3. Help us make better products

With your help we can develop and produce better products, please fill in our form [customer satisfaction survey](#).

¹Translations in languages other than Swedish are only indicative and have not been verified. Translation must always be checked against the Swedish original to ensure correct information.






2. ABOUT POE FROM MILLETEKNIK

The series is designed to power PoE devices such as access systems, surveillance cameras and other equipment that can be operated with Power over Ethernet. Through its function as a battery backup, the PoE device can continue to be powered in the event of a power failure.

PoE switch 4p M, PoE switch 4p FLX S and PoE switch 4p FLX M are for security systems where a, reliable power supply with battery backup and PoE function is needed. Our PoE have something we call "controlled charging", which is a safety function that means that batteries are not charged with more than 1 A. By controlling the charging of batteries, the lifespan of batteries is significantly extended.

3. HOW POE POWERS DEVICES CONNECTED TO THE POWER SUPPLY

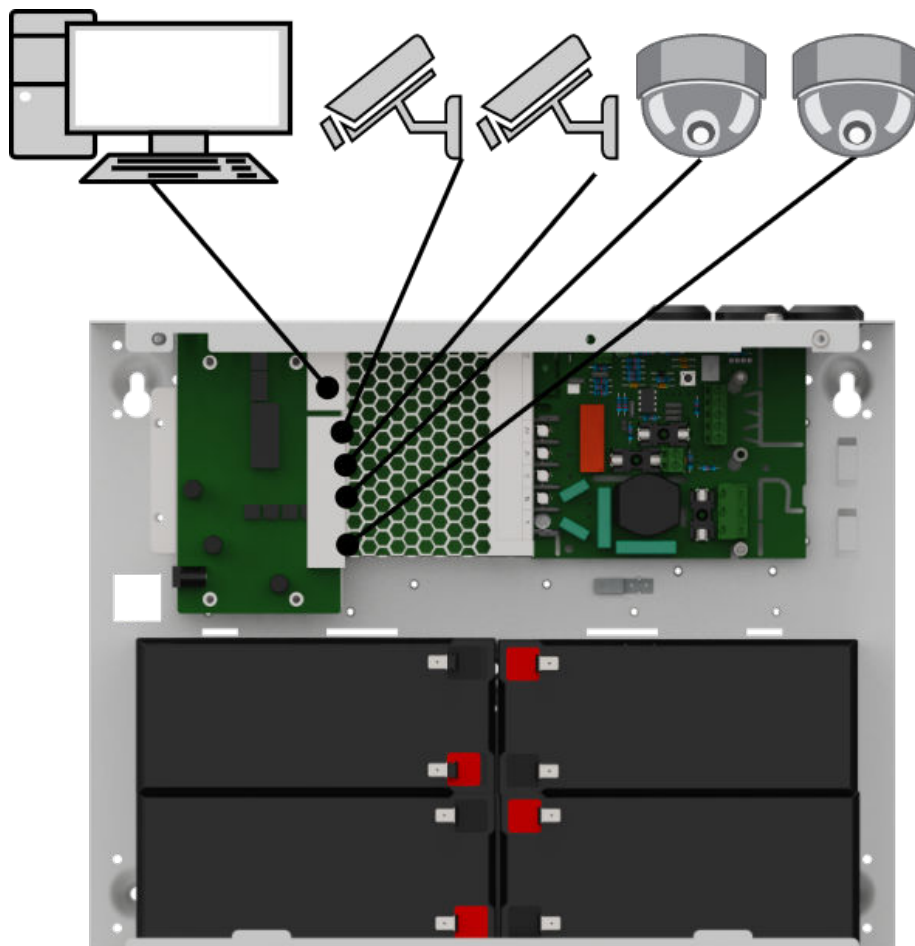

PoE can power, for example, surveillance cameras.

Connect external devices to be powered via PoE in ports 1-4.

Connect other devices that do not need to be operated with PoE in LAN1-2.





4. COMPONENT OVERVIEW POE M


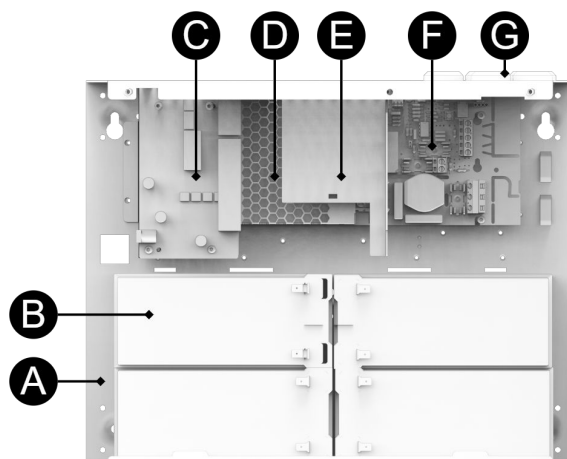


Table 1. Component overview

Symbol	Explanation
A	Casing in powder-coated sheet metal.
B	Space for batteries.
C	PoE switch.
D	Power supply unit.
E	Bracket for Keystone modules.
F	Motherboard.
G	Cable entries.

5. KEYSTONE

A plate for keystone modules makes the installation of PoE devices easier.

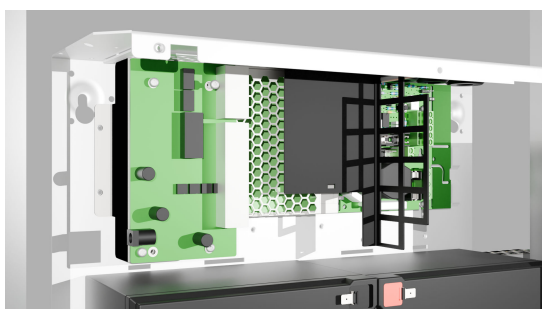

6. WALL MOUNTING


Use four screws suitable for the wall to set up the cabinet.

The distance between the screw head and the wall should be 1.5–2 mm.





Preferably leave a 100 mm air gap around the unit.

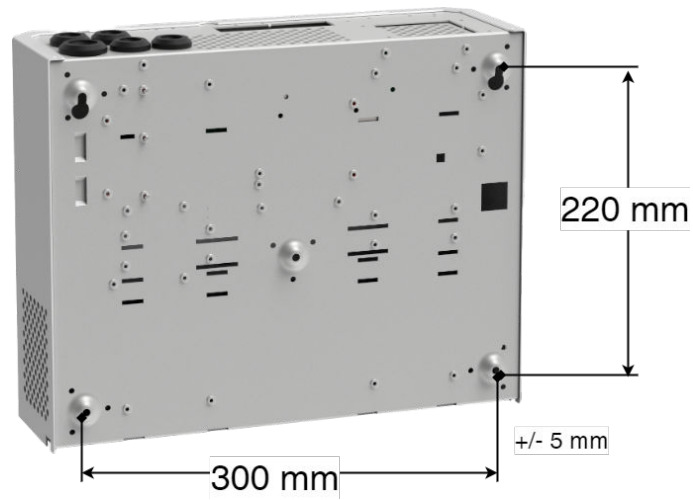

7. CONNECTION OF BATTERIES


Battery wiring is mounted on the circuit board upon delivery. Pictures below only show how to connect wiring.

1. Place the batteries in the cabinet with the battery terminals facing outwards, against the cabinet door.
 2. Connect the battery cable. Red cable on plus and black cable on minus.
- If possible, disconnect mains voltage when replacing the battery.





Figure 1. Wiring diagram for batteries in battery backup

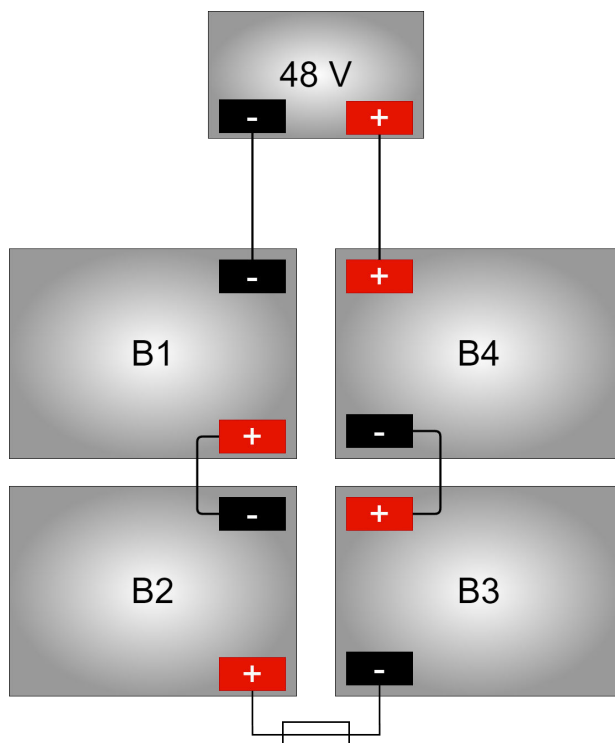


Connect the terminals correctly so that you do not damage the equipment.

8. COMMISSIONING

This unit should be installed on a wall, indoors and the temperature should be 15 - 30 ° C. IP class 20. Mains voltage must be disconnected during installation. Only authorized persons should install and maintain. The system works normally when the D6 is lit with a solid green light. Follow the steps below to commission.



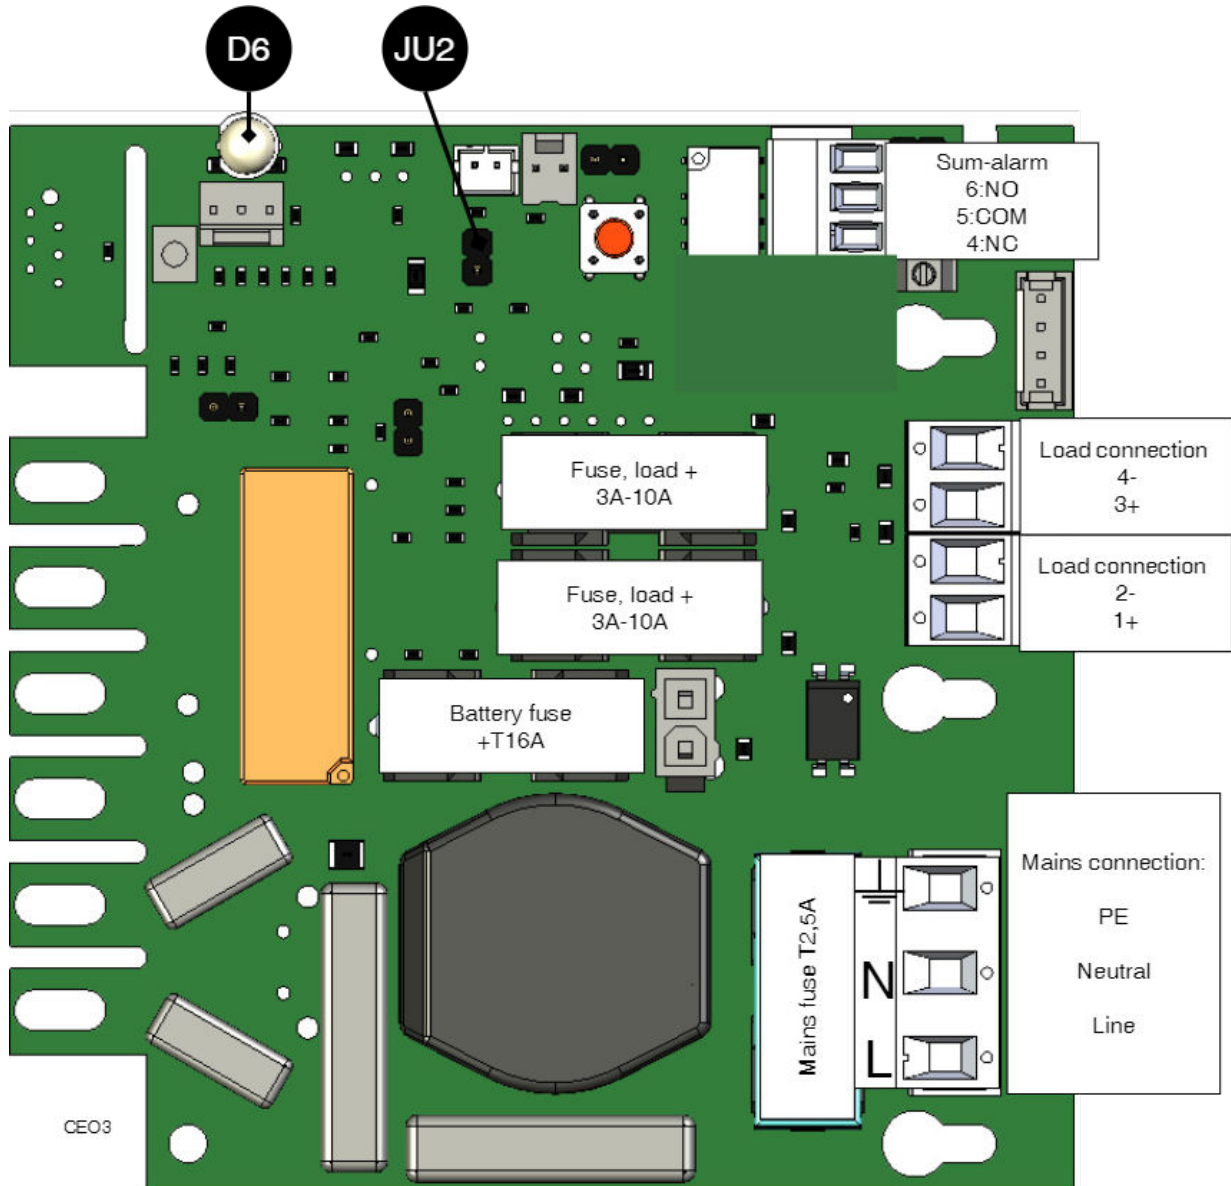

9. COMMISSIONING - HOW TO START THE UNIT

9.1. Connect in this order

To minimize the risk of errors that may occur in connection with a short circuit, connections to the motherboard must be made in this order.

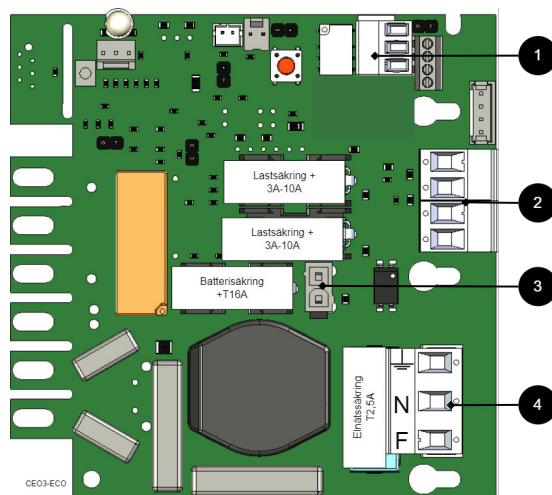


Table 2. Connect in this order

Nr	Explanation
1	Connect alarm.
2	Connect load.
3	Connect batteries
4	Connect mains.

1. Connect batteries.
2. Connect fuses.
3. Plug in PoE and other loads.
4. Screw the mains cable into the terminal and attach the terminal to the motherboard.
5. Switch on mains voltage.

The unit works normally when the indicator LED on the outside of the cabinet door lights up with a solid green light. See front panel for other status indications.

It may take up to 72 hours before the batteries are fully charged.

10. STATUS INDICATIONS

Solid green light: Normal operation.

Solid red light: Undervoltage, lights up red during a power outage until the battery voltage drops below the alarm limit.





11. MAINTENANCE

The system with the exception of batteries is maintenance-free when installed in an indoor environment.

11.1. battery change

- If possible, disconnect mains (voltage) when replacing the battery.
- Disconnect battery cables. Note how battery cables are mounted before removing them.
- Remove battery fuse between batteries.
- Insert and fasten the new batteries.
- Connect the battery cables in the same way as before.
- Connect battery fuse between batteries.
- Switch on mains voltage. The indicator LED may not be green (up to 72 hours), until the batteries are charged.
- Test the system by briefly disconnecting the mains voltage, (= the load is driven by the batteries), and then switch on the mains voltage again.

12. PRODUCT DATA SHEET

12.1. PoE

Figure 2. PoE Switch 4p M



PoE switch with 4 PoE ports.



12.1.1. Technical specifications

These technical specifications are subject to change without notice.

12.1.2. Name, article number and e-number

Table 3. Name, article number and email number.

Name	Article number	E-number (SV)
PoE switch 4p M	ME01C10048P02504PU	51 719 51

12.1.3. About PoE from Milleteknik

The series is designed to power PoE devices such as access systems, surveillance cameras and other equipment that can be operated with Power over Ethernet. Through its function as a battery backup, the PoE device can continue to be powered in the event of a power failure.

PoE switch 4p M, PoE switch 4p FLX S and PoE switch 4p FLX M are for security systems where a reliable power supply with battery backup and PoE function is needed. Our PoE have something we call "controlled charging", which is a safety function that means that batteries are not charged with more than 1 A. By controlling the charging of batteries, the lifespan of batteries is significantly extended.

POE SWITCH 4P M

Power supply with backup power to power PoE devices such as surveillance cameras and other PoE powered devices. The power supply has batteries that keep powering on when the power grid goes down. Long life, energy efficient and support is available if something goes wrong, now or in 10 years.

12.1.4. Power over Ethernet from Milleteknik

- PoE for security applications with the need for power supply with backup power.
- Proven, reliable technology.
- For fixed installation.
- Swedish made.

12.1.5. Limitations



IMPORTANT

Note that 802.3at type2 is not supported, as the PoE card lacks a handshake function for type 2. [Read more. \[13\]](#)

The product is tested and verified against Axema access systems and Dinbox access systems and is therefore recommended for use only with these systems. The product is currently not recommended for other products that have an af/at handshake procedure. The product deviates from standard IEEE 802.3af per port and IEEE 802.3at as the power is modified to be used together with Axema passer system and Dinbox passer system, which leads to shortcomings, (PoE-connected product does not start), against products that require handshake.





12.1.6. Areas of use

- Power supply for camera surveillance and other applications that can be powered by PoE.
- Security applications powered by PoE that need backup power in the event of a power outage.

12.1.7. Alarm

The device alarms for:

Low battery voltage, low battery voltage in the event of a broken fuse on the load output.

12.1.8. Fixed installation

The product is intended for fixed installation. The battery backup must be installed by a qualified installer.

12.1.9. Battery types

The ECO series can be used with AGM batteries. Do not mix types of batteries, brand or used and new batteries.

12.2. Regulations and certifications

12.2.1. Requirements that the product meets

Table 4. The product meets the following requirements.

EMC:	EMC Directive 2014 / 30EU
Electricity:	Low voltage directive: 2014/35 / EU
PoE:	IEEE 802.3af, IEEE 802.3at/30.8 W Note that 802.3at type2 is not supported, as the PoE card lacks a handshake function for type 2.
CE:	CE directive according to: 765/2008
Emission:	EN61000-6-: 2001 EN55022: 1998: -A1: 2000, A2: 2003 Class B, EN61000-3-2: 2001 EN55022 (CISPR22), GB9254 Class B, EN55014, EN61000-3-2Class A(75% Load),EN61000-3-3



12.3. Expected operating time in the event of a power failure (with new batteries)

PoE	Bat-tery	Power 15.4 W	Power 30.8 W	Power 62 W	Power 90 W	Power 100 W	Power 120 W	Power 180W	Power 240 W
PoE switch 4p M (48 V)	4 pcs 7.2 Ah	18 h 30 min.	8 h 30 min.	3 h 45 min.	-	2 h	1 h 45 min.	-	-





12.4. Circuit boards - Technical data

12.4.1. Technical data: CEO 3

Table 5. CEO3-ECO

Info	Explanation
Article name	CEO3-ECO
Product description	CEO 3 is the next generation circuit board for simpler battery backups. Advanced functions that were not previously possible in simpler battery backups are now available as standard. CEO 3 is manufactured with fewer components than before, which reduces the environmental impact.
Measure	120 x 55 mm x 52 mm
Own consumption	50 mA
Fuses	See table: Fuses.
Outputs	Output: two load outputs.
Insurance	Load output: + secured.
Max load	Maximum load is 10 A per load output (T2A is mounted from the factory) and the card's total load must not exceed 16 A.
Alarm outputs	Alarm outputs: Sum alarm in case of fuse fault, see indication below. Alarm on potential-free relay contact.
Alarm	Undervoltage, lights up red in the event of a power failure until the battery voltage drops below the alarm limit.
Alarm via	Triggered load securing, potential-free shifting, CO / NO.
Indication	Display showing operating status, alarms and faults. Operating indication: one indication diode per load output +/- . Solid green light = normal operation.

CONTROL ALARM LIMIT WITH JU2

CONTROL ALARM LIMIT

Alarm for low battery voltage in battery operation can be controlled.

By jumpering JU2, the limit for when the unit should give an alarm can be lowered.

Alarms are given when the battery voltage in battery drops below the limit.

Table 6. Low battery voltage alarm limit

Low battery voltage alarm limit	JU2 with jumper ^a .	JU2 without jumper
48 W	47 W	51 W

^aThe unit is delivered with jumper on JU2

FUSES

Table 7. Fuses.

Unit	Fuse	Type	Explanation
All units	F1	T2,5A	Mains fuse
All units	F7	T16A	Battery fuse





WARNING FOR REPLACING FUSES (CURRENT STRENGTH, A)

There is a risk of damage if the fuse is changed to a larger one than what the unit is delivered with. The function of the fuse is to protect the connected load and cables against damage and fire. It is not possible to change the fuse to a larger one to increase the power output.

12.4.2. Technical data: PoE card

LIMITATIONS



IMPORTANT

Note that 802.3at type2 is not supported, as the PoE card lacks a handshake function for type 2. [Read more. \[13\]](#)

The product is tested and verified against Axema access systems and Dinbox access systems and is therefore recommended for use only with these systems. The product is currently not recommended for other products that have an af/at handshake procedure. The product deviates from standard IEEE 802.3af per port and IEEE 802.3at as the power is modified to be used together with Axema passer system and Dinbox passer system, which leads to shortcomings, (PoE-connected product does not start), against products that require handshake.

Product	Number of PoE / LAN ports	Max power per port	PoE, continuous power	Ethernet type	Network ports	Interface	Functions	Type, injector and switch
PoE switch 4p M	4/2	30,8 @ 54,6 V DC	125 W	Fast Ethernet Mbit PoE switch	10 / 100 PoE	1000Base-T RJ-45	Auto-negotiation, Auto-uplink (auto MDI/MDI-X)	Unmanaged. There is no software interface to control the switch.

12.5. Power supply

12.5.1. Power supply - Technical Data LRS-150-48

Info	Explanation
Output voltage	54.6 V
Output current	0 A - 3.3 A
Output voltage, ripple	200 mVp-p
Overvoltage	55.2 V - 64.8 V
Voltage recharge, ripple / current limitation	Less than 0.6 Vp-p





Info	Explanation
Efficiency	90%
Current limitation	110% - 140%
Constant voltage	+/- 0.5%
Regulatory accuracy	* / - 1.0%
Input current (230 V)	1.7 A
Mains voltage frequency	47 Hz- 63 Hz
Mains voltage	230 V AC - 240 V AC
Brand effect	158.4 W
Temperature range	-30°C - +70°C
Humidity range	20% - 90% RH non-condensed

The power supply is adapted and calibrated with the battery / hardware of the battery backup. Only power and calibrated power supplies may be used. Contact support when changing power supplies. Use of power supplies coming from another source may cause damage not covered by the warranty. Warranty is canceled if power supplies (from a source other than support / designated by support) that are not correctly calibrated are used.

12.6. Technical data enclosures

12.6.1. Enclosures - Technical Data M

Info	Explanation
Name	M
Enclosure class	IP 20
Measure	Height: 242 mm, width: 350 mm, depth: 150 mm.
Height units	-
Mounting	Wall
Ambient temperature	+ 5 ° C - + 40 ° C. For best battery life: + 15 ° C to + 25 ° C.
Environment	Environmental class 1, indoors. 20% ~ 90% relative humidity
Material	Powder coated sheet
Color	White
Cable entries, number	5
Batteries that fit	2 pcs 12 V 7.2 Ah or 2 pcs 12 V 14 Ah. 4 pcs 12 V 7.2 Ah

12.7. Link to the latest information

Products and software are subject to updates, you will always find the latest information on our website.

[PoE](#)





12.8. Warranty, support, country of manufacture and country of origin

12.8.1. Warranty

The product has a two-year warranty, from the date of purchase (unless otherwise agreed). Support during the warranty period can be reached at support@milleteknik.se or telephone, +46 31-34 00 230. Compensation for travel and / or working hours in connection with locating faults, installing repaired or replaced goods is not included in the warranty. Contact Milleteknik for more information. Milleteknik provides support during the product's lifetime, however, no later than 10 years after the date of purchase. Switching to an equivalent product may occur if Milleteknik deems that repair is not possible. Support costs may (at Milleteknik's discretion) occur after the warranty period has expired.

12.8.2. Support

Do you need help with installation or connection?

You will find answers to many questions at: www.milleteknik.se/support

Phone: +46 31-340 02 30

Support is open: Monday-Thursday 08:00-16:00, Fridays 08:00-15:00. Closed 11:30-13:15.

SPARE PARTS

Contacted support for questions about spare parts.

SUPPORT AFTER THE WARRANTY PERIOD

Milleteknik provides support during the life of the product, but no longer than 10 years after the date of purchase. Replacement for an equivalent product may occur if the manufacturer deems that repair is not possible. Costs for support and replacement are added after the warranty period has expired.

QUESTIONS ABOUT PRODUCT PERFORMANCE?

Contact sales: 46 31-340 02 30, e-mail: sales@milleteknik.se

12.8.3. Country of manufacture

Country of manufacture / country of origin is Sweden. For more information, contact your seller.

12.8.4. Designed and produced by: Milleteknik AB

Designed and produced by Milleteknik AB

12.9. Batteries - recommended, not included

12.9.1. Batteries are not included they are sold separately

Batteries are sold separately.



12.9.2. 7.2 Ah, 12 V AGM battery

Fits in	Number of batteries
PoE switch 4p M	4

Battery type	V	Ah
Maintenance-free AGM, lead-acid battery.	12 V	7.2 Ah

Table 8. 10+ Design life * battery

Article number	E-number	Article name	Terminal	Measure. Height width depth	Weight per piece	Make
MT113-12V07-01	5230536	UPLUS 12V 7.2Ah 10+ Design Life battery	Flat pin 6.3 mm	151 x 65 x 100 mm.	2.4 kg	UPLUS

*Design life is the shelf life in years for an unused battery. Environmental factors such as heat and load affect the service life. Batteries that have a durability (+10 Design Life) of 10+ years usually need to be replaced after 5-6 years.

13. PRODUCT LIFE CYCLE, ENVIRONMENTAL IMPACT AND RECYCLING

The product is designed and constructed for a long service life, which reduces the environmental impact. The product's service life depends on, among other things, environmental factors, mainly ambient temperature, unforeseen load on components such as lightning strikes, external damage, handling errors, and more. Products are recycled by being handed over to the nearest recycling station or sent back to the manufacturer. Contact your distributor for more information. Costs that arise in connection with recycling are not reimbursed.



14. ADDRESS AND CONTACT DETAILS

Milleteknik AB
 Ögärdesvägen 8 B
 S-433 30 Partille
 Sweden
 +46 31 340 02 30
 info@milleteknik.se
 www.milleteknik.com

This instruction item number: 350-205 \$ {{/d:article [1]/@xml:lang}} \$



This page is intentionally left blank.

This page is intentionally left blank.