

[SV] OM



[sv] Avsäkringskort, med summalarm, används för att skydda elektroniska kretsar från skador på grund av överström eller kortslutning.

MOUNTING IN BATTERY BACKUP

The card is delivered mounted in it's plastic casing, for easy installation.


If the card has come loose, snap it back into the plastic casing.


Mount the card on any card slot in the enclosure, leave space for cables.



IMPORTANT


Install the board before screwing on wiring or commissioning.

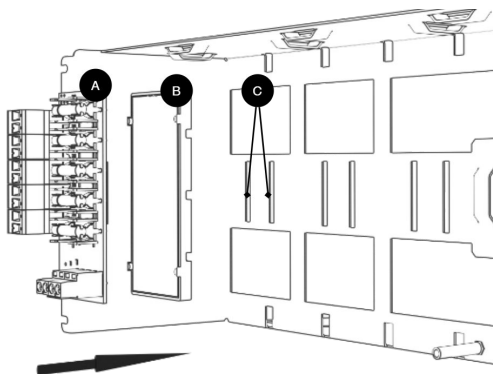

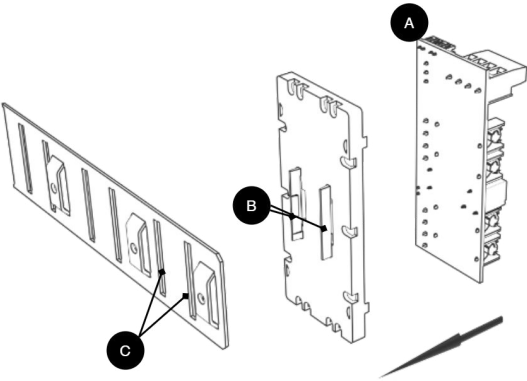

Letter	Explanation	Comment
A	Optional card	Optional card comes mounted on plastic housing from factory. Has it come loose? Snap it back on before mounting the card.
B	Plastic casing	The plastic casing has hooks for attaching slots in the plate.
C	Place for plastic casing	Slits in sheet metal to snap the plastic bracket.

[SV] KORTBESKRIVNING

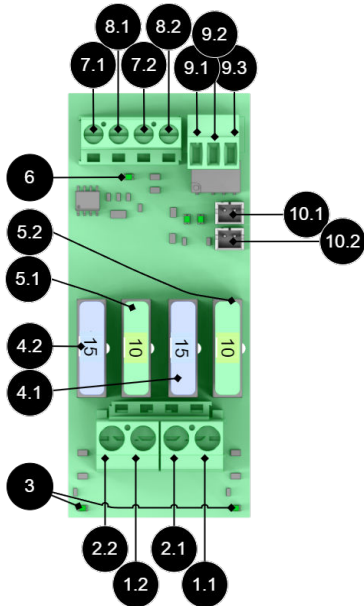


[sv] Kortöversikt

[sv] Nr	[sv] Beskrivning
1.1, 1.2	[sv] - (minus) ut.
2.1, 2.2	[sv] + (plus) ut.
3	[sv] Indikeringsdiod, lyser grönt om det finns inkopplad last.
4.1, 4.2	[sv] + (plus) säkring, 15 A
5.1, 5.2	[sv] - (minus) säkring, 10 A
6	[sv] Indikeringsdiod, lyser grönt om det finns inkopplad strömmatning.
7.1, 7.2	[sv] - (minus) strömmatning från moderkort eller annat tillvalskort.
8.1, 8.2	[sv] + (plus) strömmatning från moderkort eller annat tillvalskort.
9.1	[sv] Larm, NO.
9.2	[sv] Larm, CO
9.3	[sv] Larm, NC.
10.1, 10.2	[sv] Alternativ larminkoppling.

Use the supplied cable

Use the cable that comes with the box to connect the card.

[SV] ANSLUT 2 OUTPUT MOEDOM LLIT ELUDRORP TROK2 3V15A-25A

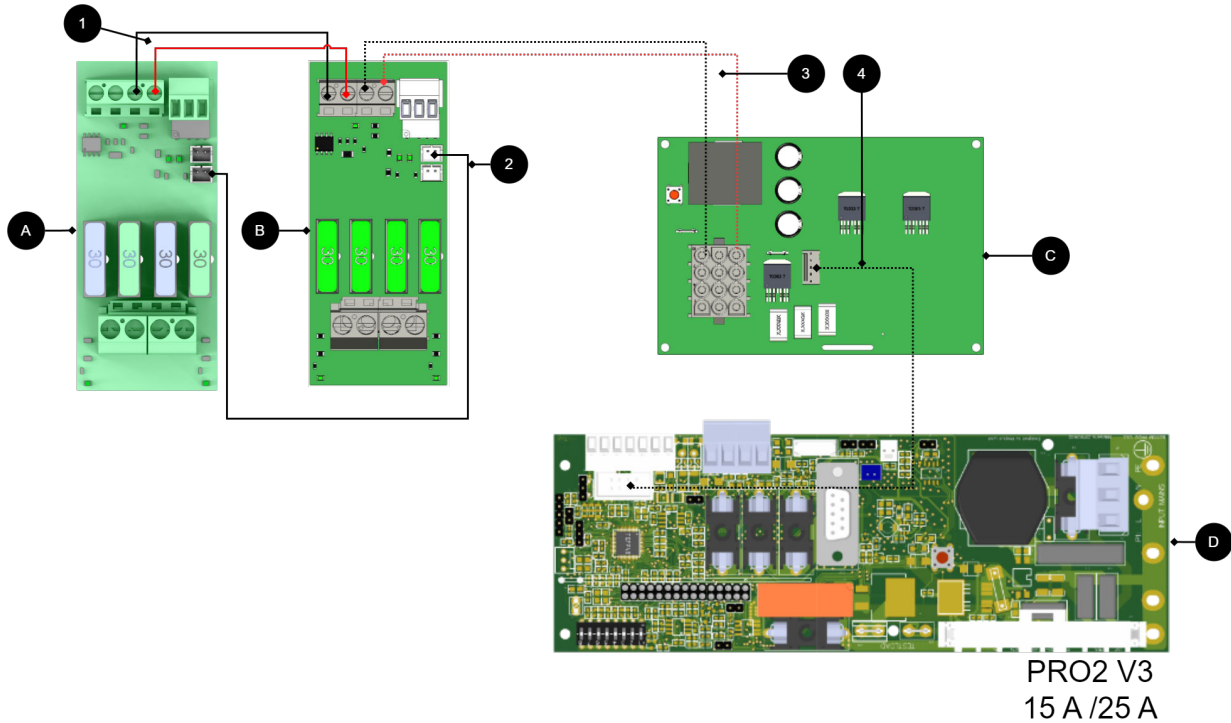

[sv] Anslutningar 15 A och 25 A enheter

[sv] Nr/bokstav	[sv] Kretskort	[sv] Förklaring
D	[sv] PRO2 v3	[sv] Moderkort i batteribackup.
C	[sv] Effektkort	[sv] Finns i batteribackuper 15 A och 25 A enheter.
1	[sv] A och B	[sv] Koppla in strömmatning från 2 output module (B) till 2 Ouput module 15A (A).
A	[sv] 2 Output module 15A	[sv] Tillvalskort (A).
B	[sv] 2 Output module	[sv] Koppla strömmatning (24 V) till 2 Output module 15A (A).
2	A	[sv] Koppla larm från 2 Ouput module 15A till lastkort.
3, 4	-	[sv] Intern strömmatning och kommunikation mellan kort.

PRODUCT SHEET - POWER SUPPLY / BATTERY BACKUP

Product sheet - power supply from Milleteknik

PRODUCT IMAGE



NAME, ARTICLE NUMBER AND E-NUMBER

Name, article number and email number

Name	Item number	E-number (sv)
[sv] 2 Output module 15A (bifogat 10, 25, 30)	[sv] A-FU00240M15ALM01	-

DESIGNATION

Fuse cards, with sum-alarm, are used to protect electronic circuits from damage due to overcurrent or short circuit.

AREA OF USE

Used when more load outputs are needed.

TECHNICAL DESCRIPTION

[sv] Avsäkringskort med två 2-poligt avsäkrade utgångar.

VOLTAGE, CURRENT AND POWER

Voltage in:

Voltage out:

Power outlet:

OUTPUTS

[sv] Två 2-poligt avsäkrade lastutgångar.

ALARM

Alarms for fuse failures are forwarded to the battery backup, which displays the alarm on the LED or via communication.

FUSES

ENCLOSURE

The product lacks an enclosure and is mounted in an existing enclosure.

Dimensions, with and without packaging.

Dimensions, height x width x depth	Dimensions with packaging.
30 x 40 x 89 mm.	120 x 215 x 165 mm.

Height units, fan and IP class.

HE	Built-in fan	IP class
The product lacks an enclosure		

WEIGHT

Weight.

Name	Net weight	Weight incl. packaging
[sv] Avsäkringskort 2utgångar 15 A	[sv] 0,1 kg	[sv] 0,2 kg

INSTALLATION REQUIREMENTS

The product must be installed in a compatible product from Milleteknik.

THE ACCESSORIES FITS IN

Number of cards that fit in the power supply.

Product series	Enclosure size	Number of cards that can fit ^a
ECO	M	2
ECO, NEO, NOVA	FLX S	2
EN54, NEO, NOVA	FLX M	3
NEO, NOVA	FLX L	3
19 rack module holders	4U	8

^aThe number of cards/accessories that can fit is the total number that can fit in the housing. Electronic and mechanical limitations may exist.

REQUIREMENTS THAT THE PRODUCT MEETS

The product meets the following requirements.

EMC:	EMC Directive 2014 / 30EU
Electricity:	Low voltage directive: 2014/35 / EU
CE:	CE directive according to: 765/2008
Environment	REACH Regulation: Directive 1907/2006, WEEE Regulation: Directive 20021961E, RoHS Regulation: Directive 2015/863



GUARANTEE

The product has a two-year warranty against manufacturing defects. Batteries and wearing parts are not covered by warranty.

MANUFACTURING, LIFESPAN, ENVIRONMENTAL IMPACT AND RECYCLING

Manufactured by Milleteknik in Partille, Sweden.

ABOUT THIS INFORMATION

All information is published subject to possible errors. Information is updated without prior notice.

Publication date 2024-09-05