

MAIN PURPOSE

The purpose of this memo is to inform that the product EN54 24V 5A FLX M has been discontinued and to provide guidance on replacement products. The document should ensure a clear transition to alternative solutions and minimize impact in ongoing and future projects


Quotations in which the product is included will be referred to any of the recommended replacement products.

PRODUCTION ANNOUNCEMENT

EN54 24V 5A FLX M has been discontinued. The product is discontinued when one of its main components is no longer manufactured. A redesign would require a new certification process, where the cost is judged to be disproportionately high relative to the demand of the product. As a replacement, we refer to the following products:

- EN54 24V 10A FLX M
- EN54 24V 5.5A MX M

These products cover equivalent and extended needs in the same application area.

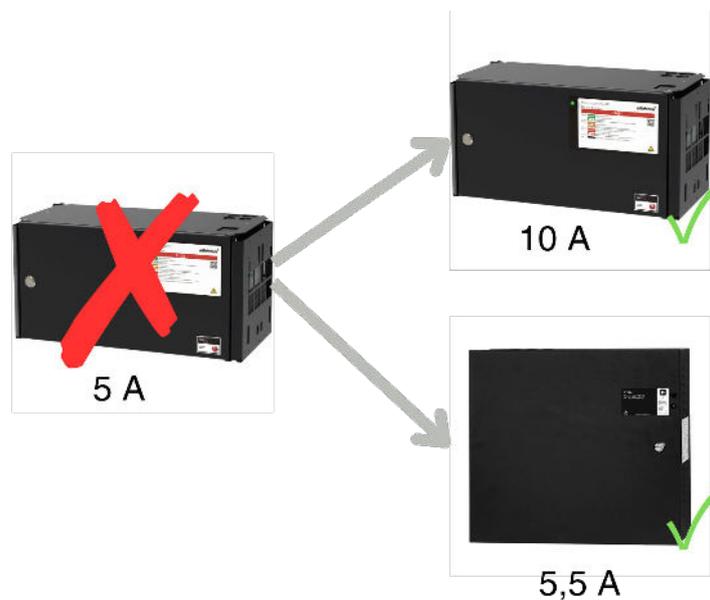

EN54 24V 5A FLX M Replacement Table

Product	Item No.	E-number	Status
EN54 24V 5A FLX M	FM01P20024P050-EN54	52 135 51	Expires
EN54 24V 10A FLX M	FM01P20024P100-EN54	52 135 52	Substitutes
EN54 24V 5.5A MX M	C010P00024P055-EN54	52 136 30	Substitutes

Why two replacements?

EN54 24V 5A FLX M is not replaced by a direct equivalent product. Instead, reference is made to existing products in the range that cover the need depending on the application and system structure

EN54 24V 10A FLX M is an option within the same product family (FLX) and enclosure size, for installations where a higher output power can be accepted without changing the system architecture.

The EN54 24V 5,5A MX M is an option within the MX series, which is based on a different system configuration and is suitable for installations where this architecture is advantageous.

Recommended choice

Selection of a replacement product shall be based on the power requirements of the application and the selected system platform.

- For installations where the FLX platform is used and where a higher output power is acceptable, the EN54 24V 10A FLX M. This is the most closely related option from a system and installation perspective.
- For installations where the MX platform is current, or where other system configuration is desired, the EN54 24V 5,5A MX M is recommended.

In case of uncertainty regarding the choice of replacement product, contact sales representatives or technical support for guidance.

WHEN THE CHANGE APPLIES FROM

The change is effective as of 2026-03-26. From this date EN54 24V 5A FLX M will be discontinued and will no longer be offered or produced

CONTACT PERSONS FOR MORE INFORMATION

Sale: Magnus Lund, 031-34 00 233, Sebastian Svanström, sebastian.svanstrom@milleteknik.se 031-34 00 233 or Denis Vandjia, 0735-404 643, denis.vandjia@milleteknik.se.

Technical information: Johan Dahlpil, johan.dahlpil@milleteknik.se.

Technical information: Elias Bylund, Product Specialist. elias.bylund@milleteknik.se,

Technical support: Robert Spånell, robert.spanell@milleteknik.se, 031-34 00 230.